


Rodamiento de bolas una hilera ZKLN3062-2Z-INA - ZKLN3062-2Z-INA


<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-bola/una-hilera/zkln3062-2z-ina>

Axial angular contact ball bearings ZKLN3062-2Z
double direction, gap seats on both sides

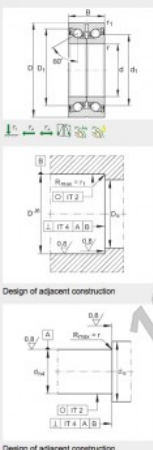

d	30 mm	Tolerance: -0.005
D	62 mm	Tolerance: -0.010
B	28 mm	Tolerance: -0.25
	60 °	Contact angle
D _{1max}	53 mm	
d ₁	45.5 mm	
d _{2max}	40 mm	
r _{1max}	0.6 mm	
r _{2max}	0.3 mm	
m	0.39 kg	Mass
C _d	29500 N	Basic dynamic load rating, axial
C _{0a}	46400 N	Basic static load rating, axial
P _{0dmax}	4320 ² Nmm	Limiting speed for grease lubrication
M _{0d}	0.26 Nm	Bearing frictional torque
C _{0d}	300 N/mm	Axial rigidity
C _{0a}	300 N/mmrad	Tilting rigidity
M _{0d}	0.73 kg x cm ²	Mass moment of inertia for rotating inner ring
	2.5 µm	Axial runout
		The axial runout data for screw drive bearing arrangements are based on the rotating inner ring.
	ZK30	Designation of recommended INA locknut
	AM30	Designation of recommended INA locknut
		Locknuts not included in delivery.
M ₀	32 Nm	Tightening torque
		Only valid in conjunction with INA-precision locknuts
	10451 N	Axial preload force

Design of adjacent construction



Design of adjacent construction

CARACTERÍSTICAS DEL PRODUCTO

Marca	INA
Nº Ean13	3663952334899
Diámetro interior	30 mm
Diámetro interior	1.181" inch
Impermeabilización	Placa de protección en ambos lados
Diámetro exterior	62 mm
Diámetro exterior	2.441" inch
Espesor	28 mm
Espesor	1.102" inch
Envasado	1

contacto@123rodamiento.es

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE