


Rodamiento de bolas una hilera ZKLN70120-2Z-INA - ZKLN70120-2Z-INA

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-bola/una-hilera/zkln70120-2z-ina>

Axial angular contact ball bearings ZKLN70120-2Z
double direction, gap seals on both sides

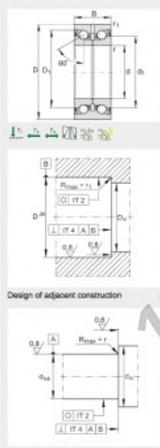

d	70 mm	Tolerance: -0.008
D	120 mm	Tolerance: -0.015
B	45 mm	Tolerance: -0.25
	60 °	Contact angle
D_u max	110 mm	
d_i	95 mm	
d_u min	92 mm	
r_i max	0.6 mm	
r_u min	0.6 mm	
m	2.4 kg	Mass
C_u	85000 N	Basic dynamic load rating, axial
C_{0u}	281000 N	Basic static load rating, axial
n_{lim} grease	2300 1/min	Limiting speed for grease lubrication
M_{fr}	1.2 Nm	Bearing frictional torque
S_{ax}	±400 N/mm	Axial rigidity
c_{ax}	2250 Nmm/rad	Tilting rigidity
M_r	19.8 kg x cm ²	Mass moment of inertia for rotating inner ring
	3 µm	Axial runout
	The axial runout data for screw drive bearing arrangements are based on the rotating inner ring.	
	ZMA70110	Designation of recommended INA locknut
	AM70	Designation of recommended INA locknut
	Locknuts not included in delivery.	
M_t	130 Nm	Tightening torque
	Only valid in conjunction with INA precision locknuts	
	19171 N	Axial preload force

CARACTERÍSTICAS DEL PRODUCTO

Marca	INA
Nº Ean13	3663952334974
Diámetro interior	70 mm
Impermeabilización	Placa de protección en ambos lados
Diámetro exterior	120 mm
Espesor	45 mm
Envasado	1

contacto@123rodamiento.es

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE