


## Rodamiento conico 32038X-TIMKEN - 32038X-TIMKEN

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-rodillos/conico/32038x-timken>

**TAPERED ROLLER BEARINGS**  
SINGLE-ROW • IsoClass

**IsoClass**

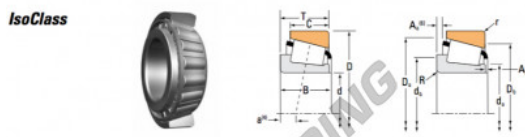

| Bearing Dimensions |         |         | Load Ratings          |                       |                       |                       |                       |                      | Part Number |  |
|--------------------|---------|---------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|----------------------|-------------|--|
| Bore d             | O.D. D  | Width T | Dynami <sup>(1)</sup> | Factor <sup>(2)</sup> | Dynami <sup>(3)</sup> | Factor <sup>(3)</sup> | Static C <sub>0</sub> | Assembly Inner/Outer | Part Number |  |
| mm                 | mm      | mm      | N                     | e                     | N                     | N                     | N                     |                      |             |  |
| 190.000            | 290.000 | 64.000  | 719000                | 0.04                  | 130                   | 190000                | 141000                | 1.32                 | 32038X      |  |
| 7.4803             | 11.4173 | 2.5197  | 102000                |                       |                       | 41900                 | 31700                 |                      |             |  |

| Bearing Dimensions |        |           |  |                                      |                                      |  |                                      |                                      |                               | Geometry Factors              |                |                | Bearing Weight |                |
|--------------------|--------|-----------|--|--------------------------------------|--------------------------------------|--|--------------------------------------|--------------------------------------|-------------------------------|-------------------------------|----------------|----------------|----------------|----------------|
| Width              |        | ER Co. μm | Drift                                    |                                      |                                      | Housing                                    |                                      |                                      | Cage                          |                               | G <sub>1</sub> | G <sub>2</sub> |                | C <sub>2</sub> |
| mm                 | mm     |           | Max Shaft Fillet Radius R <sup>(4)</sup> | Backing Shoulder Dia. d <sub>s</sub> | Backing Shoulder Dia. d <sub>e</sub> | Max Housing Fillet Radius r <sup>(5)</sup> | Backing Shoulder Dia. D <sub>s</sub> | Backing Shoulder Dia. D <sub>e</sub> | A <sub>1</sub> <sup>(6)</sup> | A <sub>2</sub> <sup>(7)</sup> |                |                |                |                |
| 64.000             | 48.000 | -0.5      | 3.0                                      | 207.0                                | 214.0                                | 2.5  | 201.0                                | 207.0                                | 0.6                           | 4.0                           | 0.28           | 101.7          | 0.194          | 14.60          |
| 2.5197             | 1.8898 | -0.02     | 0.12                                     | 8.15                                 | 8.43                                 | 0.10                                       | 7.98                                 | 8.21                                 | 0.25                          | 0.16                          |                |                |                | 32.15          |

### CARACTERÍSTICAS DEL PRODUCTO

|                   |               |
|-------------------|---------------|
| Marca             | TIMKEN        |
| Nº Ean13          | 3663952354118 |
| Diámetro interior | 190 mm        |
| Diámetro exterior | 290 mm        |
| Espesor           | 64 mm         |
| Peso              | 14600 g       |
| Envasado          | 1             |

[contacto@123rodamiento.es](mailto:contacto@123rodamiento.es)

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE