


## Rodamiento de agujas GBRI142620-UU-IKO - GBRI142620-UU-IKO

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-agujas/agujas/gbri142620-uu-iko>

**IKO**  
**MACHINED TYPE NEEDLE ROLLER BEARINGS**  
With Seal, With Inner Ring, Inch Series

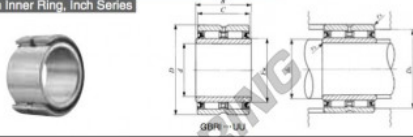

Shaft dia. mm (inch)	Identification number		Mass (Ref.) g	Boundary dimensions mm(inch)		
	With two seals	With one seal		<i>d</i>	<i>D</i>	<i>C</i>
<b>22.225</b> ( $\frac{7}{8}$ )	<b>GBRI 142620 UU</b>		200	22.225 $\frac{7}{8}$	41.275 $1\frac{1}{4}$	31.750 $1\frac{1}{4}$

<i>B</i>	<i>F<sub>w</sub></i>	Standard mounting dimensions mm			<i>r</i> <sub>as max</sub> <sup>(1)</sup>	Basic dynamic load rating <i>C</i> N	Basic static load rating <i>C<sub>0</sub></i> N	Allowable rotational speed <sup>(2)</sup> rpm	Assembled inner ring
		Min.	Max.	<i>D<sub>s</sub></i> Max.					
32.000	28.575 $1\frac{1}{4}$	27	27.5	36.3	0.6	43 900	75 300	3 000	LRBZ 141820

Notes: (1) Minimum allowable value of chamfer dimension *r*.  
(2) Allowable rotational speed applies to grease lubrication.  
Remark: This roller ring has an oil groove and an oil hole.  
2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

## CARACTERÍSTICAS DEL PRODUCTO

Marca	IKO
N° Ean13	3663952383354
Diámetro interior	22.225 mm
Diámetro exterior	41.275 mm
Espesor	31.75 mm
Envasado	1

[contacto@123rodamiento.es](mailto:contacto@123rodamiento.es)

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE