


## Rodamiento de agujas GBRI527632-UU-IKO - GBRI527632-UU-IKO

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-agujas/agujas/gbri527632-uu-iko>

**IKO**  
**MACHINED TYPE NEEDLE ROLLER BEARINGS**  
With Seal, With Inner Ring, Inch Series

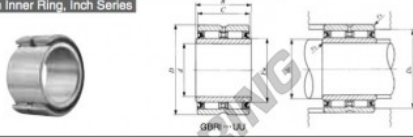

Shaft dia. mm (inch)	Identification number				Mass (Ref.) g	Boundary dimensions mm(inch)		
	With two seals		With one seal			<i>d</i>	<i>D</i>	<i>C</i>
<b>82.550</b> (3 1/4)	<b>GBRI 527632 UU</b>				2 010	82.550 (3 1/4)	120.650 (4 7/8)	50.800 (2)
<i>B</i>	<i>F<sub>w</sub></i>	Standard mounting dimensions - mm			Basic dynamic load rating <i>C</i> N	Basic static load rating <i>C<sub>0</sub></i> N	Allowable rotational speed <sup>(2)</sup> rpm	Assembled inner ring
		Min.	Max.	<i>r<sub>s</sub></i> max				
51.050	95.250 (3 3/4)	91	93	112.6	175 000	371 000	850	<b>LRBZ 526032</b>

Notes: (1) Minimum allowable value of chamfer dimension *r*.  
(2) Allowable rotational speed applies to grease lubrication.  
Remark: This roller ring has an oil groove and an oil hole.  
2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

### CARACTERÍSTICAS DEL PRODUCTO

Marca	IKO
Nº Ean13	3663952383637
Diámetro interior	82.55 mm
Diámetro exterior	120.65 mm
Espesor	50.8 mm
Envasado	1

[contacto@123rodamiento.es](mailto:contacto@123rodamiento.es)

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE