


Rodamiento de agujas NBXI2530Z-IKO - NBXI2530Z-IKO

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-agujas/agujas/nbxi2530z-iko>

LINEAR TYPE NEEDLE ROLLER BEARINGS

Needle Bearings with Thrust Ball Bearing **With Inner Ring**
Needle Bearings with Thrust Roller Bearing **With Inner Ring**

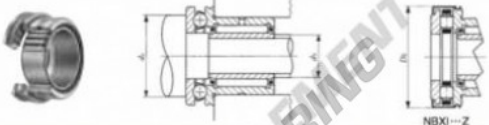

Identification number															
		Mass (Ref.) g	With dust cover		Mass (Ref.) g			Mass (Ref.) g	With dust cover		Mass (Ref.) g	d			
								NBXI 2530Z			200	25			
Boundary dimensions mm			Bore diameter mm		Basic dynamic load rating C		Basic static load rating C ₀		Allowable rotational speed ¹⁾		Assemble				
B	H	I ₁	(%) A _{min}	(%) F _w	d _a	d _b	Radial	Axial	Radial	Axial	rpm	LRT			
20.5	11	9.5	0.6	0.3	30	45	25	100	27	400	40	100	81 000	8 000	LRT

1) Minimum allowable value of chamfer dimension r.
Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 70% of this value is allowable in IAX series, and a maximum of 25% of this value is allowable in the NBXI series.
The outer ring has an oil groove and an oil hole.
Bearing is not prepacked. Perform proper lubrication.

CARACTERÍSTICAS DEL PRODUCTO

Marca	IKO
Nº Ean13	3663952390871
Diámetro interior	25 mm
Diámetro interior	0.984" inch
Diámetro exterior	42 mm
Diámetro exterior	1.654" inch
Espesor	30 mm
Espesor	1.181" inch
Envasado	1

contacto@123rodamiento.es

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE