


Rodamiento de agujas NBXI5040Z-IKO - NBXI5040Z-IKO

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-agujas/agujas/nbxi5040z-iko>

IKO
COMBINED TYPE NEEDLE ROLLER BEARINGS

Needle Roller Bearings with Thrust Ball Bearing **With Inner Ring**
Needle Roller Bearings with Thrust Roller Bearing **With Inner Ring**

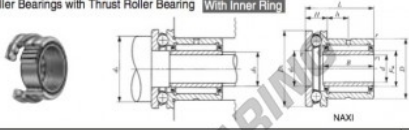

Shaft dia. mm	Identification number						d	D	D ₁
	Mass (Ref.) g	With dust cover	Mass (Ref.) g	Mass (Ref.) g	With dust cover	Mass (Ref.) g			
50	---	---	---	NBXI 5040Z		703	50	72	85
Boundary dimensions mm									
D ₂	L	B	H	I ₁	r	d ₁	d ₂	d ₃	Assembled inner ring
86.5	40	25.5	17	12	1	60	60	82	LRT 506025
Basic dynamic load rating C									
Basic static load rating C ₀									
Allowable rotational speed ⁽²⁾									
Remarks									

Notes:
(1) Minimum allowable value of chamfer dimension r.
(2) Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 70% of this value is allowable in the NAX series, and a maximum of 25% of this value is allowable in the NBX series.
Remark 1: The outer ring has an oil groove and an oil hole.
2: Grease is not prepacked. Perform proper lubrication.

CARACTERÍSTICAS DEL PRODUCTO

Marca	IKO
N° Ean13	3663952391076
Diámetro interior	50 mm
Diámetro exterior	72 mm
Espesor	40 mm
Envasado	1

contacto@123rodamiento.es

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE