


Seguidor de leva CFES12-1-UU-IKO - CFES12-1-UU-IKO

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-bola/seguidor-leva/cfes12-1-uu-iko>

IKO
CAM FOLLOWERS

Solid Eccentric Stud Type Cam Followers **With Cage/With Screwdriver Slot**

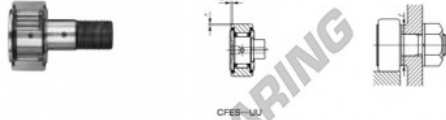

| Stud dia. mm | Identification number | | | | | | Mass (Ref.) | | | |
|-----------------|-------------------------|-----------------------------|-------------------------|-------------------------|-----------------------------|-----------------------------|-------------|----|----|----------------|
| | Shield type | | | Sealed type | | | g | D | C | d ₁ |
| | With crowned outer ring | With cylindrical outer ring | With crowned outer ring | With crowned outer ring | With cylindrical outer ring | With cylindrical outer ring | | | | |
| 12 | | | | | | CFES 12-1 UU | 105 | 32 | 14 | 12 |

| Boundary dimensions mm | | | | | | | | | | Mounting dimension f Min. mm | Maximum tightening torque N·m | Ball dynamic load rating C N | Ball static load rating C ₀ N | Maximum allowable static load N | |
|------------------------|----------------|------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|------------------------------|-------------------------------|------------------------------|--|---------------------------------|-------|
| G | G ₁ | B | B ₁ | B ₂ | B ₃ | C ₁ | B ₁ | B ₂ | B ₃ | | | | | | |
| M12×1.5 | 13 | 15.2 | 40.2 | 25 | 6 | 0.6 | 6 | 3 | 0.6 | 0.4 | 21 | 21.9 | 7 910 | 9 790 | 9 790 |

CARACTERÍSTICAS DEL PRODUCTO

| | |
|-------------------|---------------|
| Marca | IKO |
| Nº Ean13 | 3616060459268 |
| Diámetro interior | 12 mm |
| Diámetro exterior | 32 mm |
| Espesor | 14 mm |
| Envasado | 1 |

contacto@123rodamiento.es

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE