


Seguidor de leva CFE18-VUU-IKO - CFE18-VUU-IKO

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-bola/seguidor-leva/cfe18-vuu-iko>

IKO

CAM FOLLOWERS

Eccentric Type Cam Followers Full Complement Type/With Screwdriver Slot

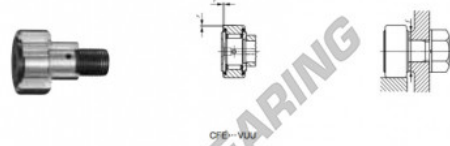

| Outside diameter of eccentric outer ring mm | Identification number | | | | Mass (Ref.) | | | | | | | | | |
|--|-------------------------|-----------------------------|-------------------------|-----------------------------|----------------|----------------|----------------|-----------------------|-------------------|--|--|--|--|--|
| | Shield type | | Sealed type | | g | D | C | d _e | | | | | | |
| 24 | With crowned outer ring | With cylindrical outer ring | With crowned outer ring | With cylindrical outer ring | CFE 18 VUU | 285 | 40 | 20 | 24 | | | | | |
| Boundary dimensions mm | | | | | | | | | | | | | | |
| G | B ₃ | B _{max} | B ₁ max | B ₂ | C ₁ | g ₁ | G ₁ | r ₁ min | Excentricity E | Mounting dimension f Min. mm | Maximum tightening torque N·m | Basic dynamic load rating C N | Basic static load rating C ₀ N | Maximum allowable static load N |
| M18 x 1.5 | 17.5 | 21.6 | 58.1 | 36.5 | 0.8 | 6 | 19 | 1 | 0.8 | 29 | 86.2 | 25 300 | 51 300 | 31 100 |

CARACTERÍSTICAS DEL PRODUCTO

| | |
|-------------------|---------------|
| Marca | IKO |
| Nº Ean13 | 3616060461162 |
| Diámetro interior | 24 mm |
| Diámetro exterior | 40 mm |
| Espesor | 20 mm |
| Peso | 285 g |
| Envasado | 1 |

contacto@123rodamiento.es

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE