


## Seguidor de leva CR32-R-IKO - CR32-R-IKO

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-bola/seguidor-leva/cr32-r-iko>

IKO

### CAM FOLLOWERS

Inch Series Cam Followers With Cage/With Screwdriver Slot

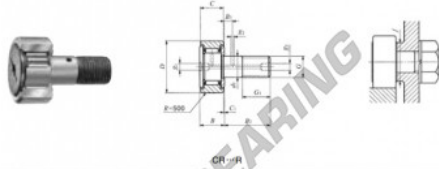

Stud dia. mm (inch)	Identification number				Mass (Ref.) g	D	C	d <sub>1</sub>	G UNF	G <sub>1</sub>
	Shield type With covered outer ring	Shield type With cylindrical outer ring	Sealed type With covered outer ring	Sealed type With cylindrical outer ring						
22.225 ( <sup>7</sup> / <sub>16</sub> )	CR 32	R			615	50.800 (2)	31.750 (1 <sup>1</sup> / <sub>2</sub> )	22.225 ( <sup>7</sup> / <sub>16</sub> )	<sup>7</sup> / <sub>16</sub> -14	25.400 (1)
Boundary dimensions mm(inch)										
B max	B <sub>2</sub>	B <sub>3</sub>	C <sub>1</sub>	δ <sub>1</sub>	δ <sub>2</sub>	F	Bearing dimension f Min. mm(inch)	Maximum tightening torque C	Basic dynamic load rating C <sub>0</sub>	Basic static load rating C <sub>0</sub>
33.5 (1.32)	50.800 (2)	12.700 ( <sup>1</sup> / <sub>2</sub> )	0.794 ( <sup>5</sup> / <sub>16</sub> )	4.762 ( <sup>3</sup> / <sub>16</sub> )	4.762 ( <sup>3</sup> / <sub>16</sub> )	1.588 ( <sup>1</sup> / <sub>16</sub> )	37.506 (1 <sup>9</sup> / <sub>16</sub> )	192	32 500	69 900

## CARACTERÍSTICAS DEL PRODUCTO

Marca	IKO
Nº Ean13	3616060463036
Diámetro interior	22.225 mm
Diámetro exterior	50.8 mm
Espesor	31.75 mm
Peso	615 g
Envasado	1

[contacto@123rodamiento.es](mailto:contacto@123rodamiento.es)

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE