


## Seguidor de leva CR26-VBR-IKO - CR26-VBR-IKO

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-bola/seguidor-leva/cr26-vbr-iko>

**IKO**  
**CAM FOLLOWERS**  
Inch Series Cam Followers **With Cage/With Screwdriver Slot**

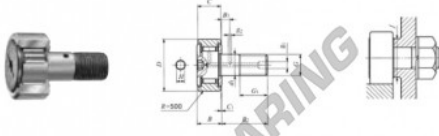

Stud dia. mm (inch)	Identification number		Shield type With cover With shield	Screw type With cylindrical outer ring With cylindrical outer ring	Mass (Ref.) g	D	C	d <sub>1</sub>	G UNF	G <sub>1</sub>	
	CR 26	VBR									
15.875 ( $\frac{5}{8}$ )	CR 26	VBR			265	41.275 ( $\frac{1}{2}$ )	22.225 ( $\frac{7}{8}$ )	15.875 ( $\frac{5}{8}$ )	$\frac{1}{4}$ -18	19.050 ( $\frac{3}{4}$ )	
Boundary dimensions mm(inch)						Mounting dimension f Min. mm(inch)	Maximum spinning torque N-m	Basic dynamic load rating C	Basic static load rating C <sub>0</sub>		
B max	B <sub>2</sub>	B <sub>3</sub>	C <sub>1</sub>	g <sub>1</sub>	g <sub>2</sub>					H	r
23.8 (0.93)	38.100 ( $\frac{1}{2}$ )	9.525 ( $\frac{3}{8}$ )	0.794 ( $\frac{1}{4}$ )	4.762 ( $\frac{3}{8}$ )	3.969 ( $\frac{1}{4}$ )	7.938 ( $\frac{1}{2}$ )	1.588 ( $\frac{1}{4}$ )	26.195 ( $\frac{1}{2}$ )	55.7	29 200	40 100

## CARACTERÍSTICAS DEL PRODUCTO

Marca	IKO
Nº Ean13	3616060463982
Diámetro interior	15.875 mm
Diámetro exterior	41.275 mm
Espesor	22.225 mm
Peso	265 g
Envasado	1

[contacto@123rodamiento.es](mailto:contacto@123rodamiento.es)

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE