


Rodamiento rodillos NNU4926K-JTEKT - NNU4926K-KOYO

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-rodillos/rodillos/nnu4926k-koyo>

Double-row cylindrical roller bearings 

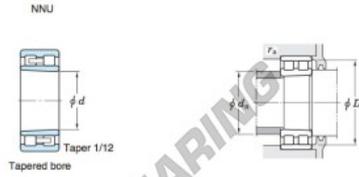

Boundary dimensions (mm)				Basic load ratings (kN)				Limiting speeds (min ⁻¹)		Bearing No.	
d	D	B	r min.	F_w	E_a	C	C_{107}	Grease lub.	Oil lub.	Cylindrical bore	Tapered bore
130	180	50	1.5	146	—	216	428	3 100	3 700		

Mounting dimensions (mm)		Mounting dimensions (mm)				(Refer.) Mass (kg)			
NNU Cylindrical bore	NNU Tapered bore	d_a min.	d_a max.	d_a min.	d_a max.	D_a min.	r_a max.	Cylindrical bore	Tapered bore
	NNU4926K	138	143.5	148	172	—	1.5	3.90	3.73

CARACTERÍSTICAS DEL PRODUCTO

Marca	JTEKT
N° Ean13	3663952473123
Diámetro interior	130 mm
Diámetro exterior	180 mm
Espesor	50 mm
Peso	3730 g
Envasado	1

contacto@123rodamiento.es

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE