

Rotulas SI

DSSIL12-T-K-DURBAL - DSSIL12-T-K-DURBAL

<https://www.123rodamiento.es/rodamiento-cojinete/rotulas/si/dssil12-t-k-durbal>

DSSIL12-T-K



female thread: maintenance free, according to DIN ISO 12240-4, series K, in stainless steel

Description: DIN ISO rod end K series. Made of spherical plain bearing DG...PW pressed into rod end body. Sliding combination steel / bronze-PTFE composite.


Red end body: stainless steel

Sliding combination: steel / bronze-PTFE composite

Inner ring: stainless steel, hardened and ground

Outer ring: stainless steel body pressed around, outer race lined with bronze-PTFE composite

Lubrication: maintenance free

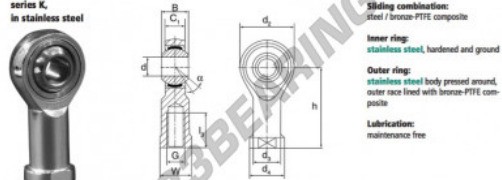

order number	right hand thread	left hand thread	measurement [mm]							
DSSIL 12 T/K			d	G	B	C1	d1	d2	d3	d4
			12	M 12	16	12,00	32	17,5	22	

type	measurement [mm]			alpha	load rating	weight
	l1 min	W	h	°	C0 (kg)	kg
DSSI / DSSIL 12 T/K	22	19	50	13	24,0	0,100

CARACTERÍSTICAS DEL PRODUCTO

Marca	DURBAL
N° Ean13	3663952491264
Diámetro interior	12 mm
Diámetro exterior	32 mm
Espesor	16 mm
Tipo	SI
Peso	100 g
Hilo	Rosca izquierda
Lubricación	sin
Envasado	1

contacto@123rodamiento.es

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE