

# Rotulas SI

## SSIL25-T-K-DURBAL - SSIL25-T-K-DURBAL

<https://www.123rodamiento.es/rodamiento-cojinete/rotulas/si/ssil25-t-k-durbal>

### SSIL25-T-K



female thread: maintenance free, according to DIN ISO 12240-4, series K, in stainless steel

Description: DIN ISO rod end K series. Made of spherical plain bearing DG...PW pressed into rod end body. Sliding combination steel / bronze-PTFE composite.


rod end body: stainless steel

Sliding combination: steel / bronze-PTFE composite

inner ring: stainless steel, hardened and ground

Outer ring: stainless steel body pressed around, outer race lined with bronze-PTFE composite

Lubrication: maintenance free

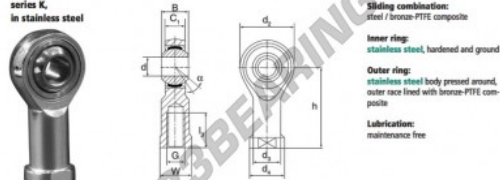

order number	right hand thread	left hand thread	measurement [mm]							
SSIL 25 T/K			d	G	B	C <sub>1</sub>	d <sub>1</sub>	d <sub>2</sub>	d <sub>3</sub>	d <sub>4</sub>
			25	M 24 x 2	31	22,00	60	33,5	42	

type	measurement [mm]				load rating C <sub>0</sub> [kN]	weight [kg]
	l <sub>1</sub> min	W	h	α		
SSI / SSIL 25 T/K	42	36	94	15	85,0	0,720

## CARACTERÍSTICAS DEL PRODUCTO

Marca	DURBAL
Nº Ean13	3663952491646
Diámetro interior	25 mm
Diámetro exterior	60 mm
Espesor	31 mm
Tipo	SI
Peso	720 g
Hilo	Rosca izquierda
Lubricación	sin
Envasado	1

[contacto@123rodamiento.es](mailto:contacto@123rodamiento.es)

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE