


Rotulas SA

BRM10-00-502-DURBAL - BRM10-00-502-DURBAL

<https://www.123rodamiento.es/rodamiento-cojinete/rotulas/sa/brm10-00-502-durbal>

BRM10-00-502

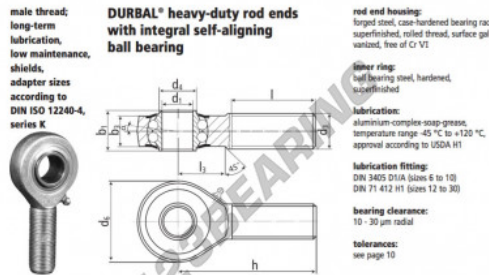

male thread:
long-term
lubrication,
low maintenance,
shields,
adapter sizes
according to
DIN ISO 12240-4,
series K

**DURBAL® heavy-duty rod ends
with integral self-aligning
ball bearing**

rod end housing:
forged steel, case-hardened bearing race,
superfinished, rolled thread, surface gal-
vanized, free of Cr-VI

inner ring:
self-bearing steel, hardened,
superfinished

lubrication:
aluminum-complex-soap-grease,
temperature range -45 °C to +120 °C,
approval according to USDA H1

lubrication fitting:
DIN 2455 D11A (sizes 6 to 10)
DIN 21 412 H1 (sizes 12 to 30)

bearing clearance:
10 - 30 µm radial
tolerances:
see page 10

order number		measurements [mm]									
Type	right-hand thread	M10	d ₁	d ₂	d ₄	d ₅	b ₁	b ₂	h		
BRM 10 -00	-502		10	M 10	12,0	28	14	10,5	48		
measurements [mm]		weight		calculation-factors		rotational speed limit		basic load rating			
Type	l	l ₃	α [°]	[kg]	Y	v ₀	C	C ₀	stat. [N]	dyn. [N]	
BRM 10	29	15	8,0	0,060	1,90	1,81	1225	4450	1450		

CARACTERÍSTICAS DEL PRODUCTO

Marca	DURBAL
Nº Ean13	3663952506975
Diámetro interior	10 mm
Diámetro exterior	28 mm
Espesor	14 mm
Tipo	SA
Peso	60 g
Hilo	Rosca izquierda
Lubricación	con
Envasado	1

contacto@123rodamiento.es

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE