Rodamiento de bolas una hilera
3002-SC-NICE - 3002-SC-NICE

https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-bola/una-hilera/3002-sc-nice

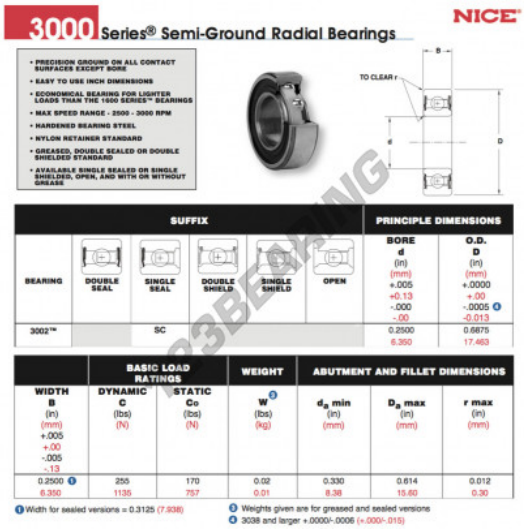

3000 Series® Semi-Ground Radial Bearings

NICE

- PRECISION GROUND ON ALL CONTACT SURFACES EXCEPT BORE
- EASY TO USE INCH DIMENSIONS
- ECONOMICAL BEARING FOR LIGHTER LOADS THAN THE 1000 SERIES™ BEARINGS
- MAX SPEED RANGE - 2500 - 3000 RPM
- HARDENED BEARING STEEL
- NYLON RETAINER STANDARD
- GREASED, DOUBLE SEALED OR DOUBLE SHIELDED STANDARD
- AVAILABLE SINGLE SEALED OR SINGLE SHIELDED, OPEN, AND WITH OR WITHOUT GREASE

SUFFIX						PRINCIPLE DIMENSIONS	
BEARING	DOUBLE SEAL	SINGLE SEAL	DOUBLE SHIELD	SINGLE SHIELD	OPEN	BORE d (in) (mm) +.005 +0.13 -.000 -.00	O.D. D (in) (mm) +.0000 +.00 -.0005 [4] -0.013
3002™		SC				0.2500 6.350	0.6875 17.463

BASIC LOAD RATINGS		WEIGHT	ABUTMENT AND FILLET DIMENSIONS		
WIDTH B (in) (mm) +.005 +.00 -.005 -.13	DYNAMIC C (lbs) (N)	STATIC Co (lbs) (N)	W [3] (lbs) (kg)	d_a min (in) (mm)	D_a max (in) (mm)	r max (in) (mm)
0.2500 [1] 6.350	255 1135	170 757	0.02 0.01	0.330 8.38	0.614 15.60	0.012 0.30

[1] Width for sealed versions = 0.3125 (7.938)
[3] Weights given are for greased and sealed versions
[4] 3038 and larger +.0000/-.0006 (+.000/-.015)

CARACTERÍSTICAS DEL PRODUCTO

Marca	NICE
N° Ean13	3663952558011
Diámetro interior	6.35 mm
Diámetro exterior	17.463 mm
Espesor	6.35 mm
Peso	10 g
Envasado	1

contacto@123rodamiento.es
911 436 830
CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE