


Accesorio de cojinete N6906-NICE - N6906-NICE

<https://www.123rodamiento.es/rodamiento-cojinete/cojinete/accesorio/n6906-nice>

6900 Series™ Semi-Ground Radial Bearings, Extended Inner with Flanged Housing **NICE**

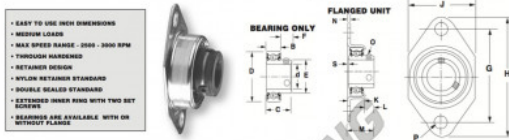

- EASY TO USE DIMENSIONS
- MEDIUM LOADS
- MAX SPEED RANGE: 2000 - 3000 RPM
- THROUGH HARDENED
- RETAINED RINGS
- NYLON RETAINER STANDARD
- DOUBLE SEALED STANDARD
- EXTENDED INNER RING WITH TWO SET SCREWS
- BEARINGS ARE AVAILABLE WITH OR WITHOUT FLANGES

BEARING		PRINCIPLE DIMENSIONS							
FLANGED UNIT	BEARING ONLY SUFFIX	Bore d (in) (mm)	O.D. D (in) (mm)	Width B (in) (mm)	Width C (in) (mm)	E (in) (mm)	F (in) (mm)	G (in) (mm) Bolt Centers	H (in) (mm)
N6906™	B	0.375 9.53	0.9063 23.02	0.313 7.94	0.688 17.46	0.555 14.10	0.375 9.53	1.875 47.63	2.500 63.50

PRINCIPLE DIMENSIONS							BASIC LOAD RATINGS		WEIGHT	
J (in) (mm)	K (in) (mm)	L (in) (mm)	M (in) (mm)	N (in) (mm)	O 2-Set Screws	P (in) (mm) Hole Dia.	S (in) (mm)	C (lbs) (N)	C ₂ (lbs) (N)	W (lbs) (kg)
1.125 28.58	0.344 8.73	0.344 8.73	0.688 17.46	0.035 0.89	8-32	0.3125 7.94	0.020 0.50	580 2581	300 1335	0.07 0.03

① When Ordering specify whether assembly or bearing only is required. Bearings are stamped with designation and suffix B, for example 6904™B. Housings no longer carry part numbers.
② Tolerance for 6912 and larger is +.0005/-0.0006 (+000/-015) ③ Weights given are for greased and sealed version with flange mount.

CARACTERÍSTICAS DEL PRODUCTO

Marca	NICE
Nº Ean13	3663952564784
Diámetro interior	9.53 mm
Diámetro exterior	23.02 mm
Espesor	7.94 mm
Envasado	1

contacto@123rodamiento.es

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE