


## Casquillos de agujas BHAM168-IKO - BHAM168-IKO

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-agujas/casquillos-agujas/bham168-iko>

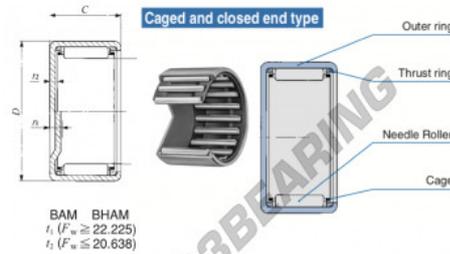

Boundary dimensions mm(inch)			Standard mounting dimensions mm			Back dynamic load rating	Basic static load rating	Allowable axial displacement	Allowable axial displacement with ring
$F_w$	$D$	$C$	$r$	$M$	$M'$	$C$	$C_0$	mm(0.015)	mm(0.015)
20.490 (0.807)	33.338 (1.313)	12.750 (0.502)	3.6					10000	13100

## CARACTERÍSTICAS DEL PRODUCTO

Marca	IKO
Nº Ean13	3616060600424
Diámetro interior	25.4 mm
Diámetro exterior	33.338 mm
Espesor	12.7 mm
Velocidad límite	15000 rpm
Carga dinámica	10.2 kN
Carga estática	13.1 kN
Envasado	1

[contacto@123rodamiento.es](mailto:contacto@123rodamiento.es)

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE