


Casquillos de agujas BHAM1610-IKO - BHAM1610-IKO

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-agujas/casquillos-agujas/bham1610-iko>

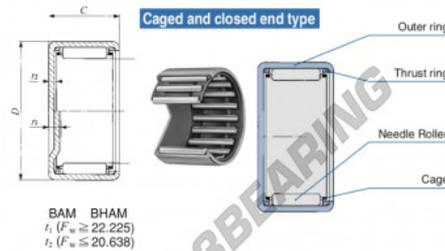

BAM BHAM
 $t_1 (F_{10} \geq 22.225)$
 $t_2 (F_{10} \leq 20.638)$

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating		Basic static load rating		Allowable axial displacement		Assembled bearing ring	
F_w	D	C	r_1	r_2	r_3	r_4	C	CP	C_0	C_{0P}	mm(°)	μm	μm	rpm
21.600 (1)	33.338 (1 5/16)	15.881 (625)	3.4						15300	22100	15000	-		

CARACTERÍSTICAS DEL PRODUCTO

Marca	IKO
N° Ean13	3616060600431
Diámetro interior	25.4 mm
Diámetro interior	1" inch
Diámetro exterior	33.338 mm
Diámetro exterior	1 5/16" inch
Espesor	15.88 mm
Espesor	5/8" inch
Velocidad límite	15000 rpm
Carga dinámica	15.3 kN
Carga estática	22.1 kN
Envasado	1

contacto@123rodamiento.es

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE