


## Casquillos de agujas TLA4020-UU-IKO - TLA4020-UU-IKO

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-agujas/casquillos-agujas/tla4020-uu-iko>

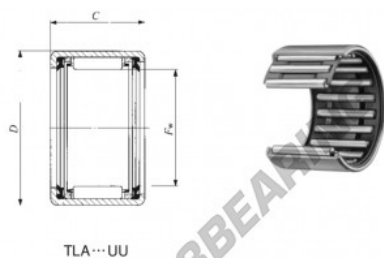

TLA...UU

Shell Type needle roller with seals

Boundary dimension		mm		Standard mounting dimensions				Basic dynamic load rating		Basic static load rating		Allowable rotational speed(1)
F		Shell dia.		Housing bore dia.				C	CP	rpm		
x	D	C	Min.	Max.	Min.	Max.	Min.	Max.	N	N		
93	54	20	52.000	49.850	57.951	57.951	28000	64100	3500			

## CARACTERÍSTICAS DEL PRODUCTO

Marca	IKO
Nº Ean13	3616060601087
Diámetro interior	40 mm
Diámetro exterior	47 mm
Espesor	20 mm
Velocidad límite	4500 rpm
Carga dinámica	16.7 kN
Carga estática	33.7 kN
Envasado	1

[contacto@123rodamiento.es](mailto:contacto@123rodamiento.es)

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE