


Casquillos de agujas TLA5026-UU-IKO - TLA5026-UU-IKO

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-agujas/casquillos-agujas/tla5026-uu-iko>

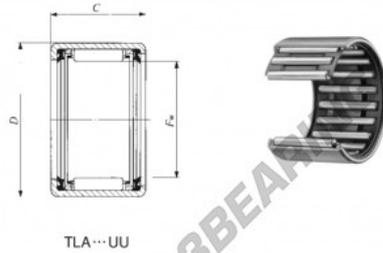

TLA...UU

Shell Type needle roller with seals

Boundary dimension	mm	Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed(1)
		Shaft dia.		Housing bore dia.				
P	D	C	H	H1	H2	C1	C2	
x	D	C	Min.	Max.	Min.	N	N	rpm
93	58	26	52.000	49.850	57.991	28800	64100	3500

CARACTERÍSTICAS DEL PRODUCTO

Marca	IKO
Nº Ean13	3616060601117
Diámetro interior	50 mm
Diámetro interior	1.969" inch
Diámetro exterior	58 mm
Diámetro exterior	2.283" inch
Espesor	26 mm
Espesor	1.024" inch
Velocidad límite	3500 rpm
Carga dinámica	28.8 kN
Carga estática	64.1 kN
Envasado	1

contacto@123rodamiento.es

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE