


## Casquillos de agujas BA167-Z-IKO - BA167-Z-IKO

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-agujas/casquillos-agujas/ba167-z-iko>

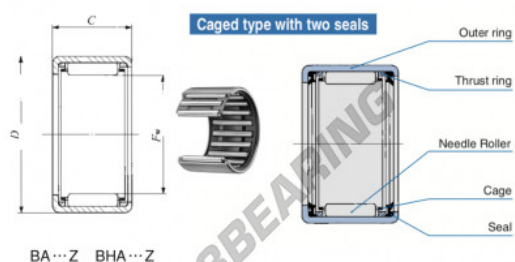

Boundary dimensions		mm[inch]		Standard mounting dimensions				mm		Basic dynamic		Basic static		Allowable		Assembled	
<i>P</i>	<i>D</i>	<i>C</i>	<i>C2</i>	Shaft dia.	<i>t6</i>	Housing bore dia.	<i>J7</i>	<i>C</i>	<i>C2</i>	load rating	load rating	rotational	inner ring	outer ring	speed	rpm	rpm
25.400	31.750	11.130	4.368	2.5				N	N	7.720	11.100	15000					

### CARACTERÍSTICAS DEL PRODUCTO

Marca	IKO
Nº Ean13	3616060601155
Diámetro interior	25.4 mm
Diámetro exterior	31.75 mm
Espesor	11.13 mm
Velocidad límite	15000 rpm
Carga dinámica	7.72 kN
Carga estática	11.1 kN
Envasado	1

[contacto@123rodamiento.es](mailto:contacto@123rodamiento.es)

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE