


Casquillos de agujas BA1614-Z-IKO - BA1614-Z-IKO

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-agujas/casquillos-agujas/ba1614-z-iko>

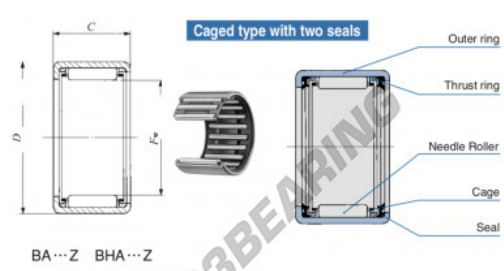

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed	Assembled inner ring
F_w	D	C	c_2	s_6	Shaft dia.	Housing bore dia.	C	C_0	rpm	
25.400	1.31750 (1.14)	22.220 (0.875)	2.8	25.400	25.387	31.764 (1.249)	16900	30400	15000	RB 1214

CARACTERÍSTICAS DEL PRODUCTO

Marca	IKO
Nº Ean13	3616060601193
Diámetro interior	25.4 mm
Diámetro interior	1" inch
Diámetro exterior	31.75 mm
Diámetro exterior	1 1/4" inch
Espesor	22.22 mm
Espesor	0.875" inch
Velocidad límite	15000 rpm
Carga dinámica	16.9 kN
Carga estática	30.4 kN
Envasado	1

contacto@123rodamiento.es

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE