


Casquillos de agujas BA1620-Z-IKO - BA1620-Z-IKO

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-agujas/casquillos-agujas/ba1620-z-iko>

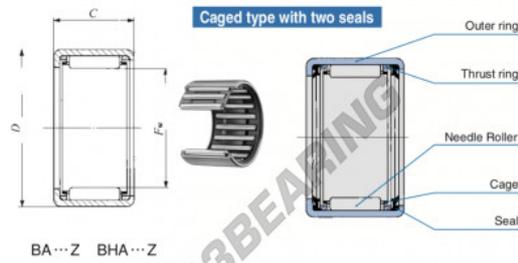

BA...Z BHA...Z

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic		Basic static		Allowable	Assemble
F_w	D	C	d	h_1	D_1	load rating		load rating		rotational	inner ring	
			Max.	Min.	Max.	Min.	N	N	N	rpm		
25.400 (1)	31.750 (1.14)	31.751 (1.250)	2.6				24400	48500	15000	IRB 1220		

CARACTERÍSTICAS DEL PRODUCTO

Marca	IKO
Nº Ean13	3616060601216
Diámetro interior	25.4 mm
Diámetro exterior	31.75 mm
Espesor	31.75 mm
Velocidad límite	15000 rpm
Carga dinámica	24.4 kN
Carga estática	48.5 kN
Envasado	1

contacto@123rodamiento.es

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE