


Casquillos de agujas BA2012-Z-IKO - BA2012-Z-IKO

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-agujas/casquillos-agujas/ba2012-z-iko>

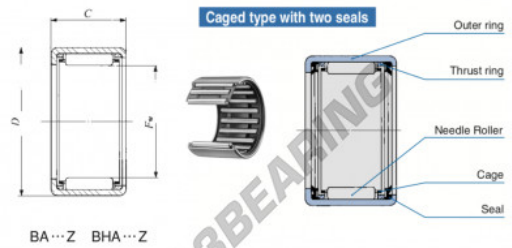

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed(1)	Assembled inner ring
F_w	D	C	Shaft dia.	Housing bore dia.	JT	C'	C_0	rpm		
31.790 (1.14)	38.100 (1.12)	19.051 (750)	Min. 2.8	Max. 31.750	31.734	Min. 38.114	Max. 36.049	15700	29600	12000 (RB 1812)

CARACTERÍSTICAS DEL PRODUCTO

Marca	IKO
Nº Ean13	3616060601339
Diámetro interior	31.75 mm
Diámetro exterior	38.1 mm
Espesor	19.05 mm
Velocidad límite	12000 rpm
Peso	33 g
Carga dinámica	15.7 kN
Carga estática	29.6 kN
Envasado	1
Estándar	Ninguna norma

contacto@123rodamiento.es

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE