


Casquillos de agujas BA2016-Z-IKO - BA2016-Z-IKO

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-agujas/casquillos-agujas/ba2016-z-iko>

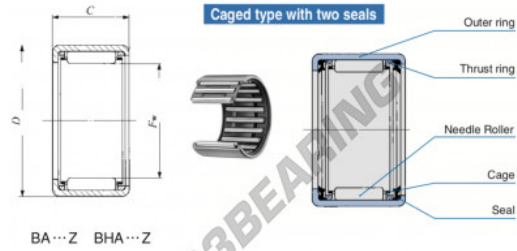

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic	Basic static	Allowable	Assembled
F_w	D	C	Shaft dia.		Housing bore dia.		load rating	load rating	rotational	inner ring
			d_2	d_6	d_7		C'	C''	speed(r)	
			Max	Min	Max	Min	N	N	rpm	
11.790 (1.14)	38.100 (1.500)	25.400 (1.000)	2.8				21500	44300	12000	RB 1616

CARACTERÍSTICAS DEL PRODUCTO

Marca	IKO
Nº Ean13	3616060601346
Diámetro interior	31.75 mm
Diámetro exterior	38.1 mm
Espesor	25.4 mm
Velocidad límite	12000 rpm
Carga dinámica	21.5 kN
Carga estática	44.3 kN
Envasado	1

contacto@123rodamiento.es

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE