


## Casquillos de agujas BA2020-Z-IKO - BA2020-Z-IKO

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-agujas/casquillos-agujas/ba2020-z-iko>

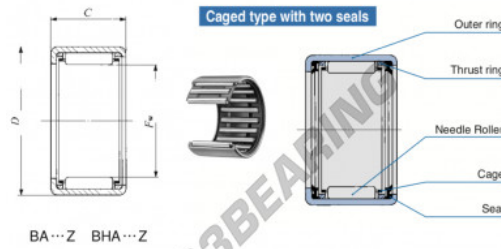

Boundary dimensions mm[inch]			Standard mounting dimensions mm				Basic dynamic load rating		Basic static load rating		Allowable rotational speed	
$F_w$	$D$	$C$	Shift dia.	Housing bore dia.	$C$	$C_0$	$n$	$n_0$	$n_1$	$n_2$	inner ring	
			IT	IT	IT	IT	min.	max.	min.	max.	rpm	
31.750	11.141	38.100	11.2	31.750	1.250	2.8	26900	59200	12000	1620	RB 1620	

### CARACTERÍSTICAS DEL PRODUCTO

Marca	IKO
Nº Ean13	3616060601353
Diámetro interior	31.75 mm
Diámetro exterior	38.1 mm
Espesor	31.75 mm
Velocidad límite	12000 rpm
Carga dinámica	26.9 kN
Carga estática	59.2 kN
Envasado	1

[contacto@123rodamiento.es](mailto:contacto@123rodamiento.es)

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE