


Casquillos de agujas BA2216-Z-IKO - BA2216-Z-IKO

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-agujas/casquillos-agujas/ba2216-z-iko>

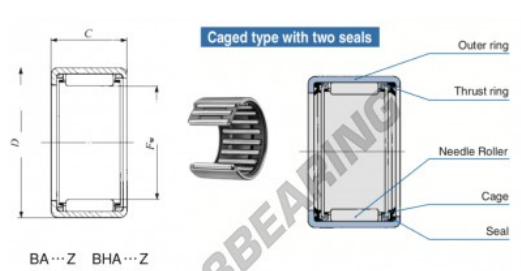

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed(r/min)	Assembled inner ring
f_{ir}	D	C	d_1	d_2	d_3	C	C _P			
	Max.	Max.	Max.	Min.	Max.	N	N	r/min		
	34.925 (1.374)	41.275 (1.625)	25.40 (1.000)	2.8				23100	50200	10000 RB 1818

CARACTERÍSTICAS DEL PRODUCTO

Marca	IKO
Nº Ean13	3616060601407
Diámetro interior	34.925 mm
Diámetro exterior	41.275 mm
Espesor	25.4 mm
Velocidad límite	10000 rpm
Carga dinámica	23.1 kN
Carga estática	50.2 kN
Envasado	1

contacto@123rodamiento.es

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE