


## Casquillos de agujas BA2410-Z-IKO - BA2410-Z-IKO

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-agujas/casquillos-agujas/ba2410-z-iko>

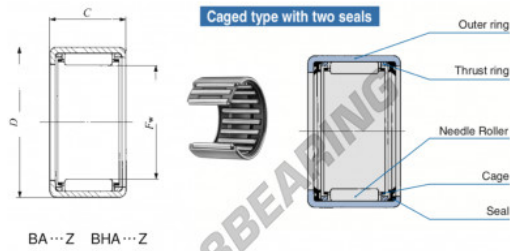

Boundary dimensions mm(inch)		Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed(r/min)	Assembled inner ring
$F_w$	D	C	d	D	C	C <sub>10</sub>	C <sub>0</sub>	speed(r/min)	
	Min.	Max.	Min.	Max.	Min.	N	N	rpm	
38.100 (1.500)	47.625 (1.875)	15.880 (0.625)	2.6			17800	27100	9000	IRB 2010

### CARACTERÍSTICAS DEL PRODUCTO

Marca	IKO
Nº Ean13	3616060601438
Diámetro interior	38.1 mm
Diámetro exterior	47.625 mm
Espesor	15.88 mm
Velocidad límite	9000 rpm
Carga dinámica	17.8 kN
Carga estática	27.1 kN
Envasado	1

[contacto@123rodamiento.es](mailto:contacto@123rodamiento.es)

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE