


Casquillos de agujas BA2414-Z-IKO - BA2414-Z-IKO

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-agujas/casquillos-agujas/ba2414-z-iko>

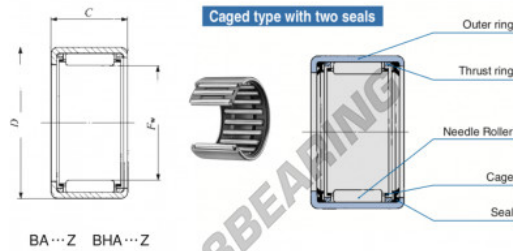

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed ⁽¹⁾	Assembled inner ring
F_w	D	C	d_1	d_2	d_3	d_4	C	C_0	rpm	
38.100 (1.500)	47.625 (1.875)	22.220 (0.875)	Min.	Max.	Min.	Max.	Min.	Max.	9000	
									RB 2014	

CARACTERÍSTICAS DEL PRODUCTO

Marca	IKO
Nº Ean13	3616060601452
Diámetro interior	38.1 mm
Diámetro exterior	47.625 mm
Espesor	22.22 mm
Velocidad límite	9000 rpm
Carga dinámica	26.7 kN
Carga estática	45.6 kN
Envasado	1

contacto@123rodamiento.es

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE