


## Casquillos de agujas BA2824-Z-IKO - BA2824-Z-IKO

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-agujas/casquillos-agujas/ba2824-z-iko>

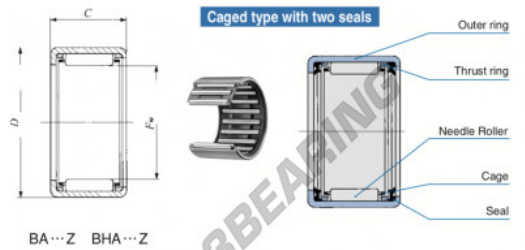

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating		Basic static load rating		Allowable rotational speed		Assembled inner ring
$F_w$	$D$	$C$	$d_2$	$H_0$	$J_1$	$C$	$C_0$	$n$	$n_0$	$R$	$R_0$	rpm	
			Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	
44.450	114.4	53.975	121.81	58.10	1.9200	2.2			52000	113000	7500	IRB 2424	

## CARACTERÍSTICAS DEL PRODUCTO

Marca	IKO
Nº Ean13	3616060601537
Diámetro interior	44.45 mm
Diámetro exterior	53.975 mm
Espesor	38.1 mm
Velocidad límite	7500 rpm
Carga dinámica	52 kN
Carga estática	113 kN
Envasado	1

[contacto@123rodamiento.es](mailto:contacto@123rodamiento.es)

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE