


Casquillos de agujas BA3010-Z-IKO - BA3010-Z-IKO

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-agujas/casquillos-agujas/ba3010-z-iko>

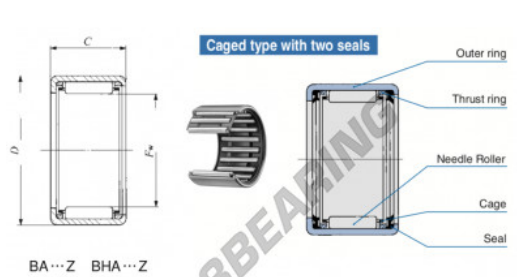

Boundary dimensions mm[inch]		Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed ⁽¹⁾	Assembled inner ring
F_w	D	C	d_1	d_2	Housing bore dia.	C	C ₀	rpm	
			Max.	Min.	Max.	Min.	N	N	
47.625 (1.8 8/16)	57.150 (2.2 4/16)	15.880 (.625)	2.0				20300	34500	7000 (RB 2419-1)

CARACTERÍSTICAS DEL PRODUCTO

Marca	IKO
Nº Ean13	3616060601551
Diámetro interior	47.625 mm
Diámetro exterior	57.15 mm
Espesor	15.88 mm
Velocidad límite	7000 rpm
Carga dinámica	20.3 kN
Carga estática	34.5 kN
Envasado	1

contacto@123rodamiento.es

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE