


## Casquillos de agujas BA4420-Z-IKO - BA4420-Z-IKO

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-agujas/casquillos-agujas/ba4420-z-iko>

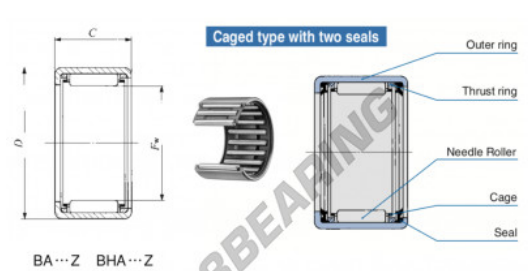

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable relative speed <sup>(1)</sup>	Assembled inner ring
$F_w$	$D$	$C$	$d_2$	$d_6$	$d_7$		$C$	$C_0$	rpm	
			Max.	Min.	Max.	Min.	N	N		
09.850	12.84	79.375	31.75	1.250	2.0		54600	139000	3500/RB 4028	

### CARACTERÍSTICAS DEL PRODUCTO

Marca	IKO
Nº Ean13	3616060601681
Diámetro interior	69.85 mm
Diámetro exterior	79.375 mm
Espesor	31.75 mm
Velocidad límite	3500 rpm
Carga dinámica	54.6 kN
Carga estática	139 kN
Envasado	1

[contacto@123rodamiento.es](mailto:contacto@123rodamiento.es)

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE