


Casquillos de agujas BA56-Z-IKO - BA56-Z-IKO

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-agujas/casquillos-agujas/ba56-z-iko>

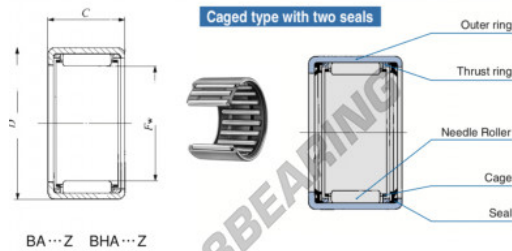

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed(1)	Assembled inner ring
F_w	D	C	d_1	d_2	d_3	d_4	C	C_0	rpm	
7.938 (1/4)	12.700 (1/2)	9.520 (3/8)	Min.	Min.	Max.	Min.	N	N	rpm	
			1				2620	2390	45000	—

CARACTERÍSTICAS DEL PRODUCTO

Marca	IKO
Nº Ean13	3616060601728
Diámetro interior	7.938 mm
Diámetro exterior	12.7 mm
Espesor	9.52 mm
Velocidad límite	45000 rpm
Carga dinámica	2.62 kN
Carga estática	2.39 kN
Envasado	1

contacto@123rodamiento.es

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE