


## Casquillos de agujas BA66-Z-IKO - BA66-Z-IKO

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-agujas/casquillos-agujas/ba66-z-iko>

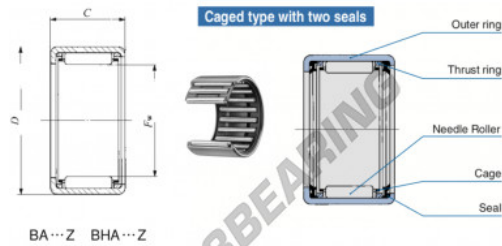

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating		Basic static load rating		Allowable speed		Assembled	
$F_w$	$D$	$C$	Shaft dia.	Housing bore dia.	$r_f$	$C$	$C_0$	rpm	rpm	rpm	rpm	rpm	rpm	rpm
Max.	Max.	Min.	Max.	Min.	Max.	Min.	Min.	Min.	Min.	Min.	Min.	Min.	Min.	Min.
9.525 (0.375)	14.288 (0.5625)	9.52 (0.375)						3000	3000	40000	40000	40000	40000	40000

## CARACTERÍSTICAS DEL PRODUCTO

Marca	IKO
Nº Ean13	3616060601766
Diámetro interior	9.525 mm
Diámetro interior	3/8" inch
Diámetro exterior	14.288 mm
Diámetro exterior	9/16" inch
Espesor	9.52 mm
Espesor	0.375" inch
Velocidad límite	40000 rpm
Carga dinámica	3.09 kN
Carga estática	3.08 kN
Envasado	1

[contacto@123rodamiento.es](mailto:contacto@123rodamiento.es)

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE