


Casquillos de agujas BA105-Z-IKO - BA105-Z-IKO

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-agujas/casquillos-agujas/ba105-z-iko>

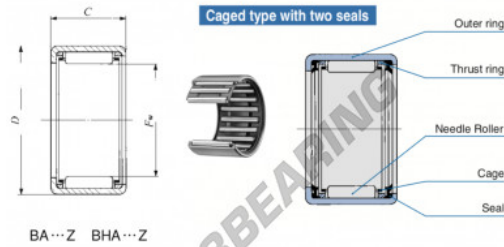

Boundary dimensions mm(inch)		Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable relative speed	Assembled inner ring
<i>F_w</i>	<i>D</i>	<i>C</i>	<i>d</i>	<i>h_d</i>	<i>JT</i>	<i>C</i>	<i>C₀</i>	rpm	
15.875 (5/8)	20.638 (81/16)	7.92 (3/2)	1.3			2870	3220	25000	-

CARACTERÍSTICAS DEL PRODUCTO

Marca	IKO
Nº Ean13	3616060602947
Diámetro interior	15.875 mm
Diámetro exterior	20.638 mm
Espesor	7.92 mm
Velocidad límite	25000 rpm
Carga dinámica	2.87 kN
Carga estática	3.22 kN
Envasado	1

contacto@123rodamiento.es

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE