


Casquillos de agujas BA1014-Z-IKO - BA1014-Z-IKO

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-agujas/casquillos-agujas/ba1014-z-iko>

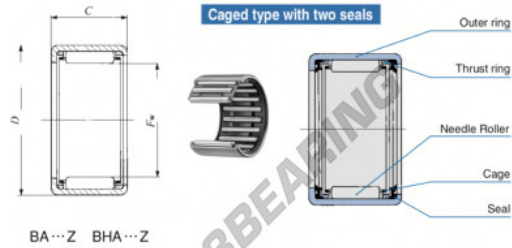

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed ⁽¹⁾	Assembled inner ring	
<i>F_w</i>	<i>D</i>	<i>C</i>	<i>d₁</i>	<i>d₂</i>	<i>H₁</i>	<i>H₂</i>	<i>C</i>	<i>C₀</i>	rpm		
	Min.	Max.	Min.	Max.	Min.	Max.	N	N			
15.875 (5/8)	20.638 (0.812)	22.221 (0.875)	1.3	15.875	15.854	20.650	20.625	10700	17500	25000	IRB T14

CARACTERÍSTICAS DEL PRODUCTO

Marca	IKO
Nº Ean13	3616060602985
Diámetro interior	15.875 mm
Diámetro exterior	20.638 mm
Espesor	22.22 mm
Velocidad límite	25000 rpm
Peso	100 g
Carga dinámica	10.7 kN
Carga estática	17.5 kN
Envasado	-
Estándar	Ninguna norma

contacto@123rodamiento.es

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE