


## Casquillos de agujas BA1112-Z-IKO - BA1112-Z-IKO

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-agujas/casquillos-agujas/ba1112-z-iko>

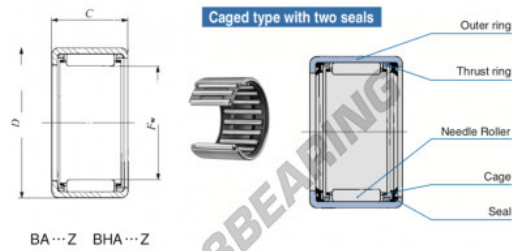

Boundary dimensions mm(inch)		Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed(I)	Assembled inner ring		
$F_w$	D	C	d <sub>1</sub>	d <sub>2</sub>	Housing bore dia.	C	C <sub>0</sub>	rpm			
	Min.	Min.	Min.	Min.	Min.	N	N	rpm			
17.462 (0.68)	22.225 ( 0.87)	19.05 ( .750)	1.5	17.462	17.451	22.237 ( 0.876)	22.216	10200	17000	25000	IPB 812

### CARACTERÍSTICAS DEL PRODUCTO

Marca	IKO
Nº Ean13	3616060603142
Diámetro interior	17.462 mm
Diámetro exterior	22.225 mm
Espesor	19.05 mm
Velocidad límite	25000 rpm
Carga dinámica	10.2 kN
Carga estática	17 kN
Envasado	1

[contacto@123rodamiento.es](mailto:contacto@123rodamiento.es)

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE