


Casquillos de agujas BA1212-Z-IKO - BA1212-Z-IKO

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-agujas/casquillos-agujas/ba1212-z-iko>

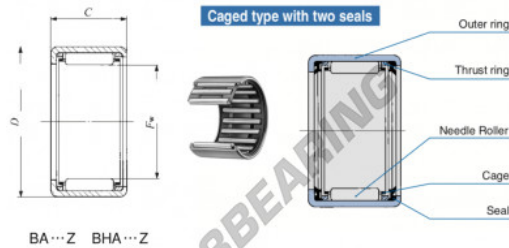

Boundary dimensions mm(inch)	Standard mounting dimensions mm				Bore dynamic load rating	Basic static load rating	Allowable rotational speed(1)	Assembled inner ring		
	D	C	r2	h6					C	C0
19.050 (0.748)	25.400 (1.0)	19.050 (0.750)	1.2	19.050 (0.750)	25.412 (1.0)	25.391 (1.0)	11900	17700	20000	IRB 812-1

CARACTERÍSTICAS DEL PRODUCTO

Marca	IKO
Nº Ean13	3616060603180
Diámetro interior	19.05 mm
Diámetro exterior	25.4 mm
Espesor	19 mm
Velocidad límite	20000 rpm
Carga dinámica	11 kN
Carga estática	17 kN
Envasado	1

contacto@123rodamiento.es

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE