


Casquillos de agujas BA1214-Z-IKO - BA1214-Z-IKO

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-agujas/casquillos-agujas/ba1214-z-iko>

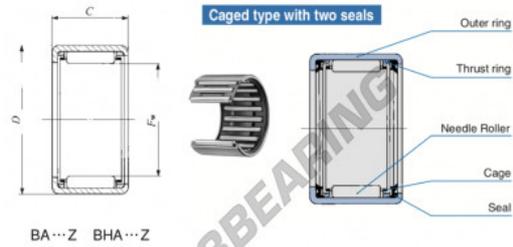

Boundary dimensions mm(inch)			Standard mounting dimensions mm						Basic dynamic load rating		Basic static load rating		Allowable rotational speed(r/min)	Assembled inner ring
F_w	D	C	d_2		H_7		J_7		C	C_0	n	n_0		
			Max.	Min.	Max.	Min.	Max.	Min.	N	N	N	rpm		
19.990 (0.41)	25.400 (1)	22.221 (0.875)	1.3	19.050	19.037		25.412	25.391	14200	22200	20000		RB #14-1	

CARACTERÍSTICAS DEL PRODUCTO

Marca	IKO
Nº Ean13	3616060603197
Diámetro interior	19.05 mm
Diámetro exterior	25.4 mm
Espesor	22 mm
Velocidad límite	20000 rpm
Carga dinámica	14 kN
Carga estática	22 kN
Envasado	1

contacto@123rodamiento.es

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE