


## Rodamiento rodillos NNU4930-JTEKT - NNU4930-JTEKT

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-rodillos/rodillos/nnu4930-jtekt>

Double-row cylindrical roller bearings 

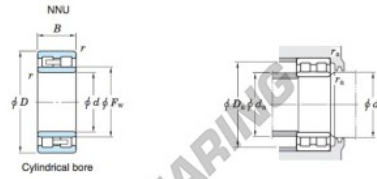

Boundary dimensions (mm)				Basic load ratings (kN)				Limiting speeds (min <sup>-1</sup> )		Bearing No.	
$d$	$D$	$B$	$r$ min.	$F_w$	$E_n$	$C$	$C_{107}$	Grease lub.	Oil lub.	Cylindrical bore	Tapered bore
150	210	60	2	168.5	—	343	692	2 600	3 100		

Mounting dimensions (mm)		Mounting dimensions (mm)				(Refer.) Mass (kg)	
min.	max.	$d_a$ min.	$d_a$ max.	$D_a$ min.	$r_a$ max.	Cylindrical bore	Tapered bore
159	166	171	201	—	2	6.50	6.22

### CARACTERÍSTICAS DEL PRODUCTO

Marca	JTEKT
N° Ean13	4549250031472
Diámetro interior	150 mm
Diámetro exterior	210 mm
Espesor	60 mm
Peso	6500 g
Envasado	1

[contacto@123rodamiento.es](mailto:contacto@123rodamiento.es)

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE