


Rodamiento rodillos NNU4956K-JTEKT - NNU4956K-JTEKT

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-rodillos/rodillos/nnu4956k-jtekt>

Double-row cylindrical roller bearings 

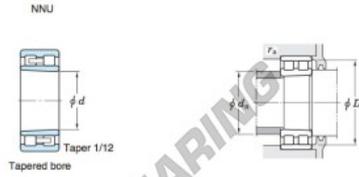

Boundary dimensions (mm)				Basic load ratings (kN)			Limiting speeds (min ⁻¹)		Bearing No. NN		
d	D	B	r _{min}	F _w	E _a	C	C ₁₀₇	Grease lub.	Oil lub.	Cylindrical bore	Tapered bore
280	380	100	2.1	308		976	2 200	1 300	1 500		

Mounting dimensions (mm)		d _a		D _a	r _s		(Refer.) Mass (kg)		
Cylindrical bore	Tapered bore	min.	max.	min.	max.	min.	max.	Cylindrical bore	Tapered bore
	NNU4956K	291	305	316	369	—	2	33.1	31.6

CARACTERÍSTICAS DEL PRODUCTO

Marca	JTEKT
N° Ean13	3663952473956
Diámetro interior	280 mm
Diámetro interior	11.024" inch
Diámetro exterior	380 mm
Diámetro exterior	14.961" inch
Espesor	100 mm
Espesor	3.937" inch
Peso	31600 g
Envasado	1

contacto@123rodamiento.es

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE