


## Rodamiento de bolas una hilera WML2508-ZZX-JTEKT - WML2508-ZZX-JTEKT

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-bola/una-hilera/wml2508-zzx-jtekt>

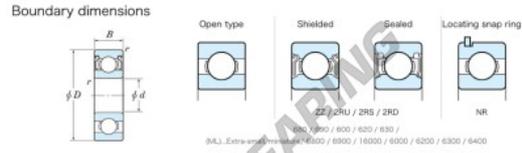

Extra small bore standard shielded ZZ

Bearing No.	Boundary dimensions (mm)				Basic load ratings (kN)		Fatigue load limit (kN) C <sub>10</sub>	factor f <sub>0</sub>	Limiting speeds (min <sup>-1</sup> ) Grease Lub.
	d	D	B	r (min)	C <sub>r</sub>	C <sub>0r</sub>			
WML2508 ZZ	2.5	8	4	0.1	0.68	0.17	5	11.5	64000

## CARACTERÍSTICAS DEL PRODUCTO

Marca	JTEKT
N° Ean13	3616060622938
Diámetro interior	2.5 mm
Diámetro exterior	8 mm
Espesor	4 mm
Velocidad límite	64000 rpm
Carga dinámica	0.68 kN
Carga estática	0.17 kN
Envasado	1

[contacto@123rodamiento.es](mailto:contacto@123rodamiento.es)

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE