


Rodamiento conico 32048X-TIMKEN - 32048X-TIMKEN

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-rodillos/conico/32048x-timken>

TAPERED ROLLER BEARINGS
SINGLE-ROW • IsoClass

IsoClass

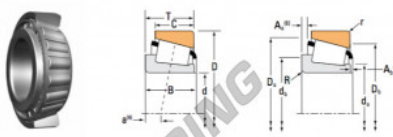

Bearing Dimensions			Load Ratings						Part Number	
Bore d	O.D. D	Width T	Dynami ⁽¹⁾ C ₁	Factor ⁽²⁾ e	Dynami ⁽³⁾ C ₂	Factor ⁽⁴⁾ K	Static C ₀	Assembly Inner/Outer		
mm	mm	mm	N		N		N			
in	in	in	lbf		lbf		lbf			
240.000	360.000	76.000	1180000	4.16	306000	241000	1200000		32048X	
9.4489	14.1732	2.9921	265500	3.25	68900	54100	430000			

Mounting Dimensions										Geometry Factors			Bearing Weight	
Shaft					Housing					Cage				
Width B	Width C	ER Co. a ⁽¹⁾	Max Shaft Fillet Radius R ⁽²⁾	Backing Shoulder Dia. d _s	Max Housing Fillet Radius r ⁽³⁾	Backing Shoulder Dia. D _s	Backing Shoulder Dia. D ₂	A ₁₁ ⁽⁴⁾	A ₁₂ ⁽⁵⁾	G ₁	G ₂	C ₃		
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg	
in	in	in	in	in	in	in	in	in	in	in	in	in	lbs	
76.000	57.000	2.2	4.0	250.0	200.0	3.0	106.0	201.0	16.0	4.4	1385.0	145.0	0.1010	25.25
2.9921	2.2441	0.08	0.16	10.20	10.16	0.12	4.182	7.933	0.63	0.17			0.67	56.17

CARACTERÍSTICAS DEL PRODUCTO

Marca	TIMKEN
Nº Ean13	3663952354163
Diámetro interior	240 mm
Diámetro exterior	360 mm
Espesor	76 mm
Envasado	1

contacto@123rodamiento.es

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE