


Rodamiento conico

H239649-H239612CD-TIMKEN - H239649-H239612CD-TIMKEN

https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-rodillos/conico/h239649-h239612cd-timken

TAPERED ROLLER BEARINGS
DOUBLE-ROW • TYPE TDD

TYPE TDD

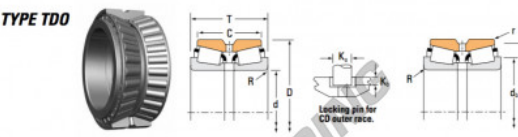

| Bearing Dimensions | | | | Load Ratings | | | | | | | | | |
|--------------------|---------|---------|---------------------------|------------------------|-------|-----------------------|----------------|------------------------|-----------------|------------------|-----------------------|------|--|
| Bore d | O.D. D | Width T | Double Outer Ring Width C | Dynamic ⁽¹⁾ | | Static ⁽¹⁾ | | Dynamic ⁽²⁾ | | | Factor ⁽³⁾ | | |
| mm | mm | mm | mm | C ₁₀ | C | Y ₁ | Y ₂ | C ₉₀ | C ₅₀ | C ₁₀₀ | K | K | |
| 187.325 | 320.675 | 185.738 | 136.112 | 163000 | 81000 | 0.32 | 2.12 | 5.19 | 273000 | 148000 | 470000 | 1.63 | |
| 7.3750 | 12.6250 | 7.3125 | 5.4375 | | | | | | 81100 | 33400 | 106000 | | |

| Part Number | | Shaft | | | | Housing | | | | Pin | | Geometry Factors | | | Bearing Weight |
|-------------|-----------|---|--------------------------------------|---|--------------------------------------|----------------|----------------|----------------|----------------|----------------|----------------|------------------|--------|--|----------------|
| Inner | Outer | Max. Shaft Fillet Radius R ₁ | Backing Shoulder Dia. d ₁ | Max. Housing Fillet Radius r ₁ | Backing Shoulder Dia. D ₁ | K ₁ | K ₂ | G ₁ | G ₂ | C ₁ | C ₂ | | | | |
| H239649 | H239612CD | 5.5 | 214.8 | 1.5 | 261.8 | 28.08 | 19.21 | 105.7 | 90.3 | 0.1242 | | | 52.16 | | |
| | | 0.22 | 8.43 | 0.06 | 11.84 | 1.13 | 0.41 | | | | | | 117.18 | | |

CARACTERÍSTICAS DEL PRODUCTO

| | |
|-------------------|---------------|
| Marca | TIMKEN |
| Nº Ean13 | 3663952360492 |
| Diámetro interior | 187.325 mm |
| Diámetro exterior | 320.675 mm |
| Espesor | 185.738 mm |
| Envasado | 1 |

contacto@123rodamiento.es

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE