


## Rodamiento axial de agujas AZ254211-IKO - AZ254211-IKO

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-agujas/axial-agujas/az254211-iko>

**IKO**  
**THRUST BEARINGS**  
Thrust Roller Bearings

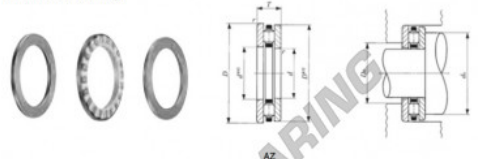

| Shaft dia. mm | Identification number |               |                       |               |                |                |               |  |
|---------------|-----------------------|---------------|-----------------------|---------------|----------------|----------------|---------------|--|
|               | Thrust roller bearing | Mass (Ref.) g | Thrust roller bearing | Mass (Ref.) g | Inner ring     | Outer ring     | Mass (Ref.) g |  |
| 25            | <b>AZ 254211</b>      | 70            | <b>AZK 25425</b>      | 28            | <b>WS 2542</b> | <b>GS 2542</b> | 21            |  |

| Boundary dimensions mm |    |    |                |                |                |   |                    |                |                | Standard mounting dimensions mm | Basic dynamic load rating C | Basic static load rating C <sub>0</sub> | Allowable rotational speed <sup>(*)</sup> |       |
|------------------------|----|----|----------------|----------------|----------------|---|--------------------|----------------|----------------|---------------------------------|-----------------------------|---|---|-------|
| d                      | D  | T  | d <sub>c</sub> | D <sub>c</sub> | D <sub>w</sub> | B | r <sub>s</sub> (1) | C <sub>1</sub> | C <sub>2</sub> | d <sub>4</sub> Min.             | D <sub>4</sub> Max.         | N                                       | N   | rpm   |
| 25                     | 42 | 11 | 25.05          | 41.6           | 5              | 3 | 0.6                | 28             | 39             | 39                              | 28                          | 22 700                                  | 60 700                                    | 9 000 |

Notes: (\*) Minimum allowable value of chamfer dimension r  
(1) Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 25% of this value is allowable.

### CARACTERÍSTICAS DEL PRODUCTO

|                   |               |
|-------------------|---------------|
| Marca             | IKO           |
| Nº Ean13          | 3616060465900 |
| Diámetro interior | 25 mm         |
| Diámetro exterior | 42 mm         |
| Espesor           | 11 mm         |
| Peso              | 70 g          |
| Envasado          | 1             |

[contacto@123rodamiento.es](mailto:contacto@123rodamiento.es)

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE