

Rotulas SI

SSI25-T-K-DURBAL - SSI25-T-K-DURBAL

<https://www.123rodamiento.es/rodamiento-cojinete/rotulas/si/ssi25-t-k-durbal>

SSI25-T-K



female thread: maintenance free, according to DIN ISO 12240-4, series K, in stainless steel

Description: DIN ISO rod end K series. Made of spherical plain bearing DG...PW pressed into rod end body. Sliding combination steel / bronze-PTFE composite.


Red end body: stainless steel

Sliding combination: steel / bronze-PTFE composite

Inner ring: stainless steel, hardened and ground

Outer ring: stainless steel body pressed around, outer race lined with bronze-PTFE composite

Lubrication: maintenance free

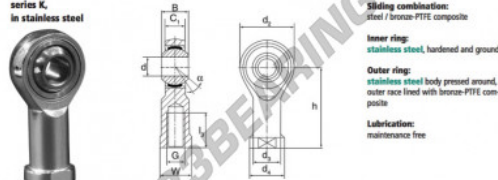

order number	right hand thread	left hand thread	measurement [mm]						
	d	G	B	C ₁	d ₁	d ₂	d ₃	d ₄	
SSI 25 T/K	25	M 24 x 2	31	22,00	60	33,5	42		

type	measurement [mm]				load rating C ₀ [kN]	weight [kg]
	l ₁ min	W	h	α [°]		
SSI / SSI 25 T/K	42	36	94	15	85,0	0,720

CARACTERÍSTICAS DEL PRODUCTO

Marca	DURBAL
N° Ean13	3663952491615
Diámetro interior	25 mm
Diámetro exterior	60 mm
Espesor	31 mm
Tipo	SI
Peso	720 g
Hilo	Rosca derecha
Lubricación	sin
Envasado	1

contacto@123rodamiento.es

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE