

## Rotulas TAPR GIHN-K-125LO-DURBAL - DGIHN-K-125LO-DURBAL


<https://www.123rodamiento.es/rodamiento-cojinete/rotulas/tapr/djih-k-125lo-durbal>

### GIHN-K-125LO



Description: Hydraulic rod end with slot and clamping arrangement. Made of spherical plain bearing DGE. LO pressed into rod end housing. Sliding combination steel / steel with grease nipple.

\* without grease nipple

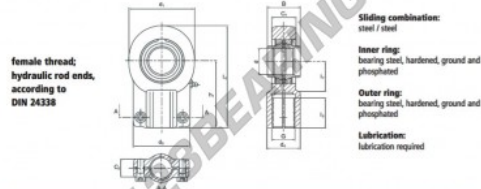

female thread;  
hydraulic rod ends,  
according to  
DIN 24338

Sliding combination:

steel / steel

Inner ring:  
bearing steel, hardened, ground and  
phosphated

Outer ring:  
bearing steel, hardened, ground and  
phosphated

Lubrication:  
lubrication required

order number	d	d <sub>1</sub>	measurement [mm]	G	d <sub>2</sub>	B	C <sub>1</sub>	C <sub>2</sub>
GIHN-K 125 LO	125	260	M100 x 3	135,0	200	125	102	72

type	l <sub>1</sub> min	measurement [mm]	l <sub>2</sub>	l <sub>3</sub>	load rating	weight
		h <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>	C <sub>0</sub> [kN]	[kg]
GIHN-K / GIHN-KL 125 LO	113	260	405,0	120	1430,0	43,00

## CARACTERÍSTICAS DEL PRODUCTO

Marca	DURBAL
N° Ean13	3663952500577
Diámetro interior	125 mm
Diámetro exterior	260 mm
Espesor	102 mm
Tipo	TAPR
Peso	43000 g
Hilo	Rosca derecha
Lubricación	con
Envasado	1

[contacto@123rodamiento.es](mailto:contacto@123rodamiento.es)

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE