


Rodamiento conico

M244249A-M244210-TIMKEN - M244249A-M244210-TIMKEN

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-rodillos/conico/m244249a-m244210-timken>

TAPERED ROLLER BEARINGS
SINGLE-ROW • TYPE TS

TYPE TS

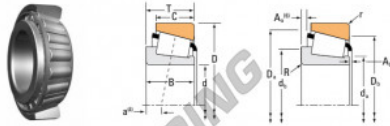

Bearing Dimensions			Load Ratings					Part Number	
Bore d	O.D. D	Width B	Dynamic ⁽¹⁾ C ₁	Factor ⁽²⁾ e	Dynamic ⁽¹⁾ C ₀₂	Factor ⁽²⁾ K	Static C ₀	Inner	Outer
mm	mm	mm	N		N		N		
220.662	314.325	61.912	64000	0.33	10800	1.78	120000	M244249A	M244210
8.6875	12.3750	2.4375	148000		27600		279000		

Bearing Dimensions										Geometry Factors			Bearing Weight	
Shaft					Housing					Cage	G ₁	G ₂		C ₃
Width B	Width C	ER. Dr. α ⁽¹⁾	Max Shaft Fillet Radius R _{f1}	Backing Shoulder Dia. d _s	Max Housing Fillet Radius r ₁ ⁽²⁾	Backing Shoulder Dia. D _s	A ₁ ⁽³⁾	A ₂ ⁽³⁾	A ₃ ⁽³⁾				Ag	
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	
66.675	48.212	-4.6	1.5	235.9	235.9	3.3	306.8	293.6	3.2	8.4	1073.1	132.4	0.1327	14.91
2.6250	1.5375	-0.18	0.06	9.25	9.25	0.13	11.81	11.54	0.12	0.02				32.88

CARACTERÍSTICAS DEL PRODUCTO

Marca	TIMKEN
Nº Ean13	3663952327501
Diámetro interior	220.662 mm
Diámetro exterior	314.325 mm
Espesor	61.912 mm
Invasado	1

contacto@123rodamiento.es

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE