


Rodamiento conico

LM286249-LM286210-TIMKEN - LM286249-LM286210-TIMKEN

<https://www.123rodamiento.es/rodamiento-cojinete/rodamiento-rodillos/conico/lm286249-lm286210-timken>

TAPERED ROLLER BEARINGS
SINGLE-ROW • TYPE TS

TYPE TS

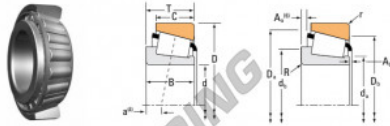

Bearing Dimensions			Load Ratings						Part Number	
Bore d	O.D. D	Width B	Dynamic ⁽¹⁾ C ₁	Factor ⁽²⁾ e	Dynamic ⁽³⁾ C ₂	Factor ⁽³⁾ C _{2e}	Static C ₃	Inner	Outer	
mm	mm	mm	N		N	N	N			
863.600	1130.300	174.625	620000	0.33	160000	963000	1.76	1700000	LM286249	LM286210
34.000	44.500	6.875	143000		36000	210000		2820000		

Bearing Dimensions										Geometry Factors			Bearing Weight	
Shaft					Housing					Cage	G ₁	G ₂		C ₃
Width B	Width C	ER. Dr. α ⁽¹⁾	Max Shaft Fillet Radius R _{f1}	Backing Shoulder Dia. d _s	Max Housing Fillet Radius r ₁ ⁽²⁾	Backing Shoulder Dia. D _s	A ₁ ⁽³⁾	A ₂ ⁽³⁾	A ₃ ⁽³⁾				kg	
185.708	136.112	14.2	0.7	906.0	915.0	12.7	1986.4	1965.0	14.6	-2.2	2050.1	1106.1	0.3033	485.42
7.3125	5.4375	0.56	0.28	35.67	36.02	0.50	42.92	41.93	0.57	-0.08				1026.67

CARACTERÍSTICAS DEL PRODUCTO

Marca	TIMKEN
Nº Ean13	3663952331560
Diámetro interior	863.6 mm
Diámetro interior	34" inch
Diámetro exterior	1130.3 mm
Diámetro exterior	44 1/2" inch
Espesor	174.625 mm
Espesor	6 7/8" inch
Envasado	1

contacto@123rodamiento.es

911 436 830

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE